

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number  
**WO 2005/059269 A1**

(51) International Patent Classification<sup>7</sup>: **E04F 15/02**

(74) Agent: STENBERG, Yngve; c/o Perstorp AB, S-284 80 Perstorp (SE).

(21) International Application Number:  
PCT/SE2004/001827

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 8 December 2004 (08.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0303420-4 18 December 2003 (18.12.2003) SE

(71) Applicant (for all designated States except US): PERGO (EUROPE) AB [SE/SE]; Stranddaregatan 8, S-231 25 Trelleborg (SE).


(72) Inventor; and

(75) Inventor/Applicant (for US only): ENGSTRÖM, Nils-Erik [SE/SE]; Hesekillegatan 26, S-231 53 Trelleborg (SE).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: A JOINT FOR A PANEL

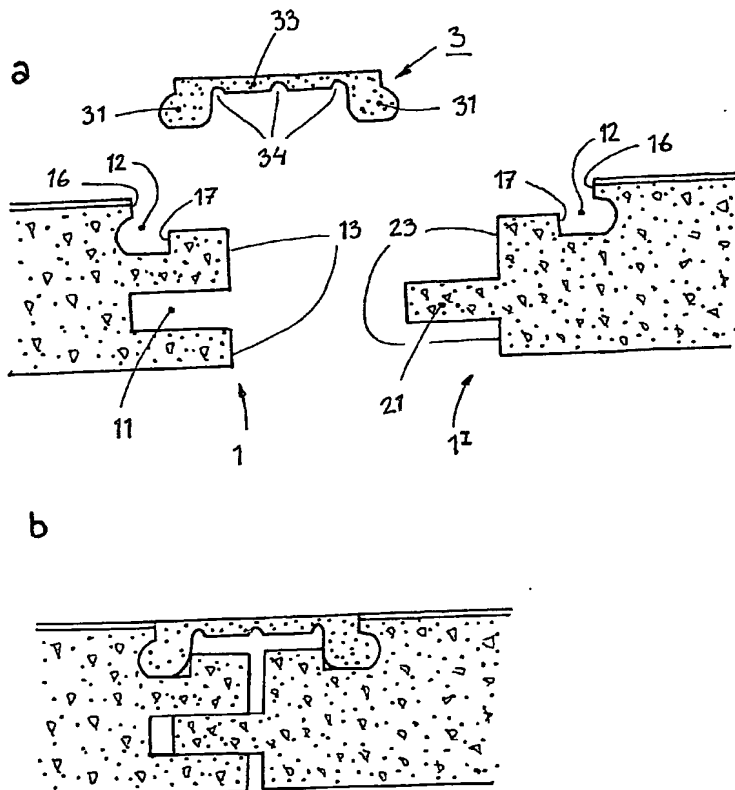

(57) Abstract: A joint for a panel, the joint comprising a first edge (1) and a second edge (1'). The first edge (1) comprises a groove (11) while the second edge (1') is provided with a tongue (21). The second edge (1') further comprises an upper side groove (12). A joining profile (3) is provided with a tongue (31) and an intermediate section (33), the joining profile (3) being so configured so as to allowing it to be located in the upper portion of the joint between two, joined, adjacent panels.



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*